





## VIPER VENT

Product	Nail Options With/Without Nails		Thickness	Length	NFVA
11" VIPER VENT 20	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	11 in./279.4 mm	20 ft.	15 in <sup>2</sup> /LF
11" VIPER VENT 50	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	11 in./279.4 mm	50 ft.	
11" VIPER VENT 4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	11 in./279.4 mm	4 ft.	
9" VIPER VENT 20	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	9 in./228.6 mm	20 ft.	
9" VIPER VENT 50	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	9 in./228.6 mm	50 ft.	
7" VIPER VENT 20	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	7 in./177.8 mm	20 ft.	
7" VIPER VENT 50	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	7 in./177.8 mm	50 ft.	

For a complete list of all our products, please contact KBP, or visit our website at [KeeneBuilding.com](http://KeeneBuilding.com)


### Applications

- ✓ Asphalt roof
- ✓ Wood roof
- ✓ Tile roof
- ✓ Metal roof
- ✓ Slate roof

\* For more information on roofing applications, please contact our office at 877-514-5336

### Center the VIPER VENT over the ridge/hip line

- Secure one end of the VIPER VENT with a nail on each side on the printed line.
- Roll out the entire length of VIPER VENT.
- Remove any slack in the VIPER VENT and secure the second end with a nail on each side of the printed line.

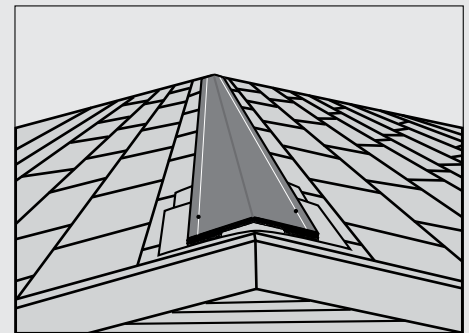

For FULL VERSION of Ridge/Hip Installation Instructions please see document: C-0201

